

**Before installing the VMX-H Configured Soft Starter thoroughly read the VMX2 user manual. To download scan the QR Code to the right or visit [motortronics.com](http://motortronics.com) (Mobile device friendly).**



After all electrical connections have been made; apply power to the VMX-H configured soft starter. The display on the Digital Keypad should be reading [0000.]

## IMPORTANT!

To operate the VMX-H configured soft starter the motor full load amps parameter F001 has to be programmed.

Motor Full Load Amps (FLA) can be found on the motor name plate.

**F001 Programming Example:** Shows how to enter motor full load amps nameplate data into parameter F001 (48A).



**MOTOR FLA (F001)  
must be programmed  
for unit to operate!**


Press Key...	Display Shows...	Means...
	0000.	Phase A Current
Fn	F001	Function #1 Selected
READ ENTER	0000	Previous Setting of Function #1
↑	0008	New Value of First Digit
←	0008	Cursor (flashing) Position Shift
↑	0048	New Value of Second Digit
READ ENTER	End	Value Accepted (flashes once)
	F001	Return to Function # Display

### Remote Start / Stop Control connections:

The VMX-H is set up for 2 wire remote control using dry contacts rated at 120VAC (0.1Amp).

### Remote Two Wire Control:

Connect a dry (voltage free) maintained contact closure between terminals 3 and 10 of the customer terminal strip as shown here (I/O PCB).

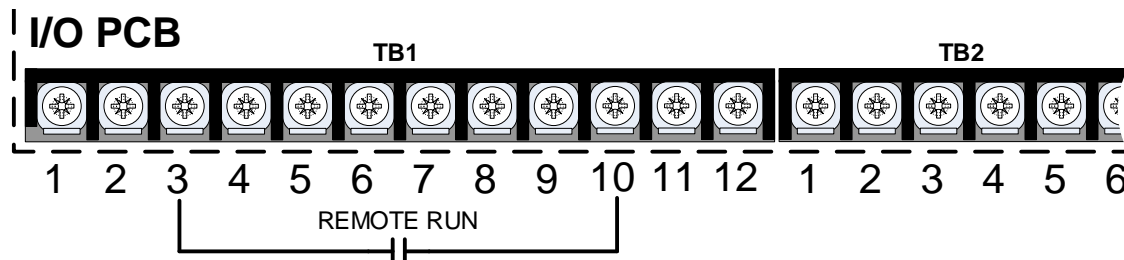

TB1 are external input command terminals:

T#1 to T#6 are logic common (120VAC).

T# 7 = External E-STOP, for normally closed E-stop contacts (factory jumped to T#6).

T# 8 = External Interlock, for normally closed interlocks (factory jumped to T#5).

T# 9 = External Overload, for normally closed auxiliary overload devices (factory jumped to T#4).

T# 10 = Remote Run command, closing to logic common commands RUN in remote mode.

T# 11 = Remote Reset command, closing to logic common resets starter in local and remote modes.

T# 12 = Remote X-Line command, closing to logic common switches starter to \*X-Line start in remote

## Start-up Parameters and Factory Defaults

Fn #	Function Name	Factory Setting	Description / Factory Setting
F001	Motor Nameplate FLA.	0	FLA must be programmed for the starter to operate.
F002	Motor Nameplate Service Factor	1.0 SF	Change only if necessary and for motors rated above 1.0SF
F003	Overload Class During Start	Class 10	NEMA / UL Class 10
F004	Overload Class During Run	Class 10	NEMA / UL Class 10
F005	Overload Reset	0 (Manual)	0 = Manual
F010	Ramp Profile	1	Ramp 1 and Ramp 2 = Voltage Ramp with Current Limit
F011	Initial Torque	60%	60% Initial Voltage
F013	Ramp Time	10 sec	10 Second Ramp (Ramp 1)
F014	Current Limit	350%	350% of programmed FLA
F015 – F018	Ramp 2 settings	---	Inactive unless Ramp 2 Input is closed
F019 – F050	Software protection and control features	---	Inactive unless selected
F051	nCP Trip (No Control Power)	0	Disabled
F052	Auto reset selected faults	4	Phase loss only
F053	Auto reset attempts	0	Disabled
F054 – F059	Timer and counter value readouts	---	Read only
F060	Aux Relay #1	1	Run / Stop
F061	Aux Relay #2	2	At-Speed / Stop
F062	Aux Relay #3	22	Any Trip
F063	Aux Relay Delay	0	No Delay
F065 – F068	Communications	---	See VMX2 User Manual for set-up
F070	Parameter Lock	0	User password disabled
F071	Reset Function	0	Use to reset to default values
F073 – F080	System settings and time clock	---	User choice to adjust clock
F085 – F093	Fault History	---	Read only
F094 – F097	Run Time / Start cycle history	---	Read only
F098 – F101	Phase Loss / Rotation settings	---	See VMX2 User Manual for set-up
F102 – F107	kW / P.F. trip settings	---	See VMX2 User Manual for set-up
F108 – F110	Analog Output set-up	---	See VMX2 User Manual for set-up
F111	default display setting	---	See VMX2 User Manual for set-up
F113	Alternate functions for Ramp2/Jog inputs	---	See VMX2 User Manual for set-up

**Fault Codes:** Refer to the Fault Code List table 7.1 in the VMX2 user manual

### California Customers:

#### California Proposition 65 Warning

WARNING: this product and associated accessories may contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information visit <https://p65warnings.ca.gov>