

CURRENT TRANSFORMER

Model 5DRL

Window Diameter 1.56"

Application:

With ammeters, wattmeters and cross current compensation.

Frequency:

50 - 400 Hz

Insulation Level:

600 Volts, 10 kv BIL full wave




- Flexible leads are UL 1015 105°C, CSA approved #16 AWG, 24" long

- Non-standard length to be specified.

- Approximate weight: 2.0 lbs.



E228202

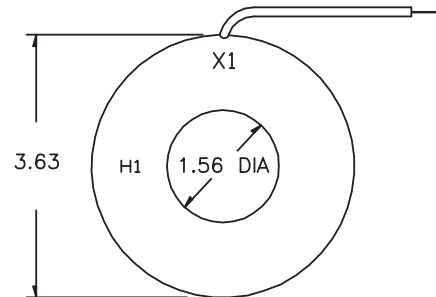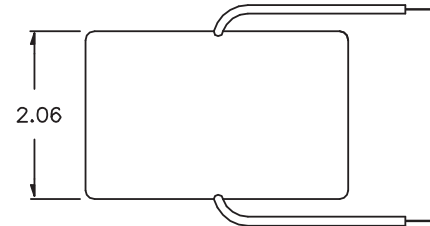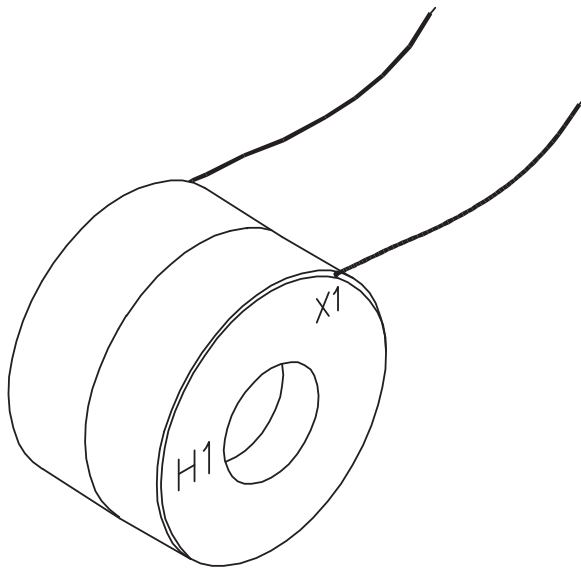

| CATALOG NUMBER | CURRENT RATIO | ACCURACY AT 60 Hz | BURDEN VA at 60 Hz |
|----------------|---------------|-------------------|--------------------|
| 5DRL-500 | 50:5 | ± 2 % | 2.5 |
| 5DRL-600 | 60:5 | ± 1 % | 2.5 |
| 5DRL-750 | 75:5 | ± 1 % | 3.5 |
| 5DRL-101 | 100:5 | ± 1 % | 5.0 |
| 5DRL-151 | 150:5 | ± 1 % | 10.0 |
| 5DRL-201 | 200:5 | ± 1 % | 12.5 |
| 5DRL-251 | 250:5 | ± 1 % | 20.0 |
| 5DRL-301 | 300:5 | ± 1 % | 25.0 |

| CATALOG NUMBER | CURRENT RATIO | ACCURACY AT 60 Hz | BURDEN VA at 60 Hz |
|----------------|---------------|-------------------|--------------------|
| 5DRL-401 | 400:5 | ± 1 % | 40 |
| 5DRL-501 | 500:5 | ± 1 % | 50 |
| 5DRL-601 | 600:5 | ± 1 % | 60 |
| 5DRL-751 | 750:5 | ± 1 % | 60 |
| 5DRL-801 | 800:5 | ± 1 % | 60 |
| 5DRL-102 | 1000:5 | ± 1 % | 75 |
| 5DRL-122 | 1200:5 | ± 1 % | 90 |