

CONTROL POWER TRANSFORMER

Model: CPT3 60 2 xxxx - 6

APPLICATION:



To provide power in Motor Control centers and Distribution Switchgear

FREQUENCY: 50/60 Hz




INSULATION LEVEL:
6.9 kV, 60 kV BIL full wave

THERMAL RATING:
At 30°C. amb. see below

- Primary and secondary terminal are brass screws No 10-32 with one flatwasher and lockwasher.
- Transformer winding is vacuum encapsulated in polyurethane resin with temperature insulation class of 105 ° C.
- Plated steel mounting base.
- For indoor use.
- Approximate weight 57 lbs.

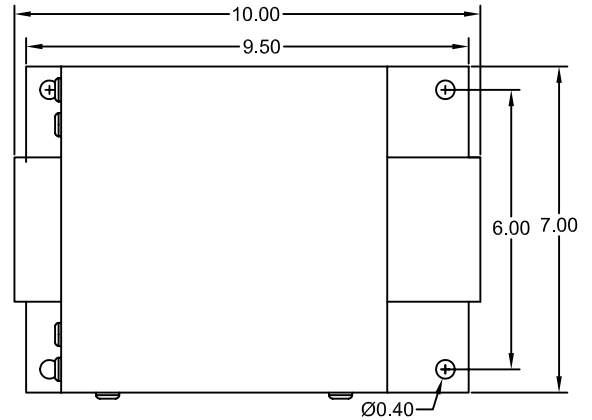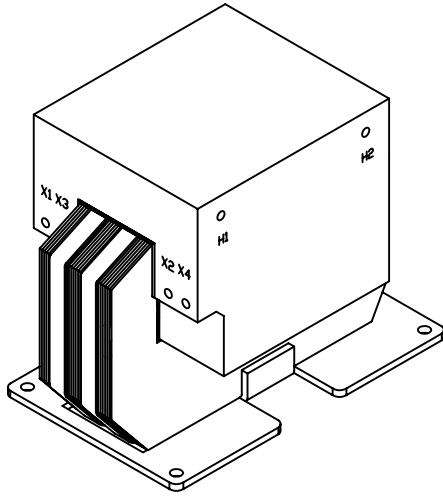

CONNECTION DIAGRAM

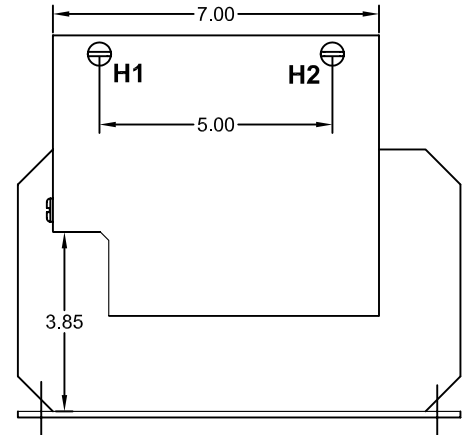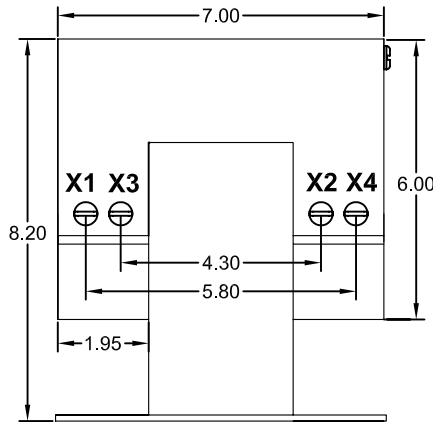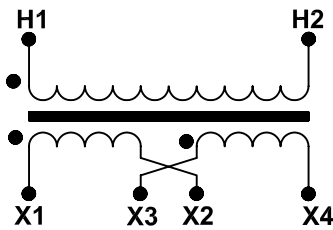

WIRING CONNECTION		
PRIMARY	LINE CONNECTION	
	H1 - H2	
SECONDARY		
	120 V	240 V
INTER CONN.	X1-X3 and X2-X4	X2-X3
LINE CONN.	X1-X4	X1-X4

CATALOG NO	PRIMARY VOLTAGE	RATIO AT 120 V	SECONDARY VOLTAGE	FREQUENCY Hz	THERMAL RATING
CPT3 60 2 2400 - 6	2400	20.00	120/240	50/60	2.0 kVA
CPT3 60 2 3300 - 6	3300	27.50	120/240	50/60	2.0 kVA
CPT3 60 2 4160 - 6	4160	34.66	120/240	50/60	2.0 kVA
CPT3 60 2 4800 - 6	4800	40.00	120/240	50/60	2.0 kVA
CPT3 60 2 5000 - 6	5000	41.66	120/240	50/60	2.0 kVA
CPT3 60 2 5500 - 6	5500	45.83	120/240	50/60	2.0 kVA
CPT3 60 2 6000 - 6	6000	50.00	120/240	50/60	2.0 kVA
CPT3 60 2 6600 - 6	6600	55.00	120/240	50/60	2.0 kVA
CPT3 60 2 6900 - 6	6900	57.50	120/240	50/60	2.0 kVA