

APPLICATION:

Relaying FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER:

APPROXIMATE WEIGHT:

50 lbs.

CONNECTIONS

- -Terminals are brass screws No. 10-32 UNF with one flat washer and a split lock washer
- -Mounting bracket # 137-KIT (optional)

Current Transformer



Model	137MR
Window Size	5.50
Width	9.88
Height	9.88
Depth	5.00

MODEL 137MR Window Diameter 5.50" Approximate weight 50 lbs.

Catalog Number	Relay Class	Continuous Thermal		
		@ 30°C	@ 50°C	
137-601MR	C200	2.0	2.0	
137-122MR	C400	2.4	1.5	
137-202MR	C400	1.5	1.0	
137-302MR	C400	1.33	1.0	
137-402MR	C400	1.0	8.0	
137-502MR	C400	0.6	0.3	

OPTIONAL MOUNTING

BRACKET #137-KIT

5.00 6.72 7.86

R.22 -9.88 000 88 H1 7.50 Ø5.50 - 9.88 4.94 7.50

7.81

0

0 0 0-



CERTIFICATIONS:









	\bigcirc	~	M	\mathcal{M}	\mathcal{M}	-
600:5A	L 40 ⊥	50	10	20	turns	Ĺ
(X	5) (X4)	'	(3) (X	(2)	(>	(1)
1200:5A	L 80 T	100		<u> </u>	turns	Ļ
2000:5A	5) <u>(X4</u>) ()	(3) (X	(2)	()	(1)
2000.3A		60 \ (160 (3)		turns	Ţ
3000:5A	الان الان ا 100 ا	60 (ار ا 240	ري ا 200	turns	של
(X	5) (X4		_ /	(2)		(1)
4000:5A	200	200	300	100	turns	ĺ
(X	5) (34) ((3) (X	2	(>	(i)
5000:5A	200	400	100	<u> </u> 300	turns	Ĺ
(×	5) (X4)) ((3) (X	(2)	(>	(1)
M	ARKED RA	ATIO (M	<u>R)</u>			


Current Transformer


rev 09182025

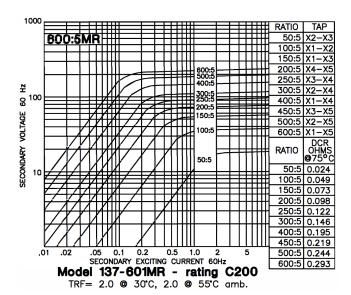


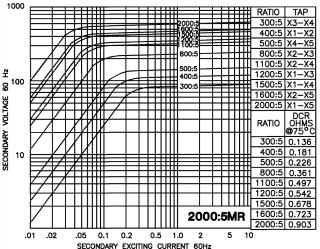

Model 137-202MR - rating C400 TRF= 1.5 @ 30°C, 1.0 @ 55°C amb.

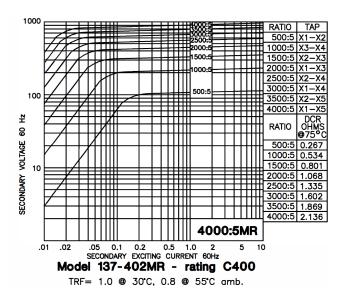

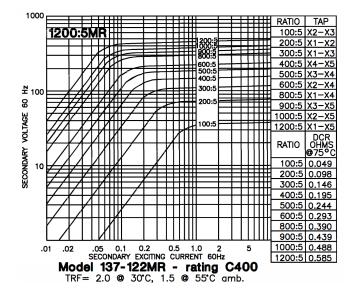

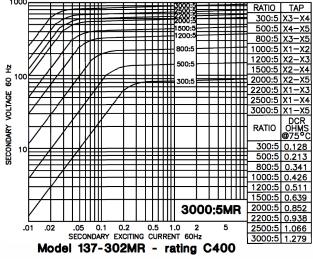

TRF= 1.33 @ 30°C, 1.0 @ 55°C amb.

