



# Current Transformer

## Model 5DRL

**APPLICATION:**

With ammeters, wattmeters and cross current compensation

**FREQUENCY:**

50-400 Hz.

**INSULATION LEVEL:**

600 Volts. 10 kV BIL. full wave

**WINDOW DIAMETER:**

1.56"

**APPROXIMATE WEIGHT:**

2.0 lbs.

**CONNECTIONS:**

- Flexible Leads are UL 1015 105°C, CSA approved #16AWG, 24" long
- Non-standard length to be specified



5DRL




Model	5DRL
Window Size	1.56
Width	3.63
Height	3.63
Depth	2.06

**CERTIFICATIONS:**



**MODEL 5DRL**  
**Window Diameter 1.56"**  
**Approximate weight: 2.0 lbs.**

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
5DRL-500	50:5	+ 2%	2.5
5DRL-600	60:5	+ 1%	2.5
5DRL-750	75:5	+ 1%	3.5
5DRL-101	100:5	+ 1%	5
5DRL-151	150:5	+ 1%	10
5DRL-201	200:5	+ 1%	12.5
5DRL-251	250:5	+ 1%	20
5DRL-301	300:5	+ 1%	20
5DRL-401	400:5	+ 1%	40
5DRL-501	500:5	+ 1%	50
5DRL-601	600:5	+ 1%	60
5DRL-751	750:5	+ 1%	60
5DRL-801	800:5	+ 1%	60
5DRL-102	1000:5	+ 1%	75
5DRL-122	1200:5	+ 1%	90

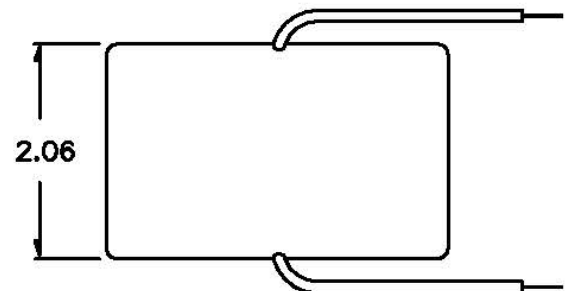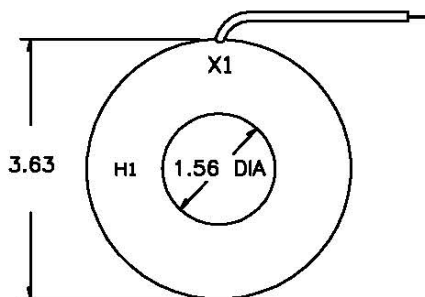

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA